


## Pump Specifications

### RH-8Y-3621-00 Various RPM

DOUBLE VOLUTE

Speed	Impeller Dia	Style	Solids Dia	N <sub>S</sub>	Suction	Discharge	No. Vanes
Various	Various	Enclosed	.75"	3200	10.0	6.0	6

HQ	TRIM	RPM	HQ	TRIM	RPM	HQ	TRIM	RPM	HQ	TRIM	RPM	FULL DIAMETER
A	11,00"-0"	2400	C	11,00"-0"	2000	D	11,00"-0"	1800	E	11,00"-0"	1600	
B	11,00"-0"	2200		10,44"-13"	2200		10,31"-13"	2000		10,25"-13"	1800	
	10,44"-13"	2400		9,81"-13"	2400		9,69"-13"	2200		9,56"-13"	2000	

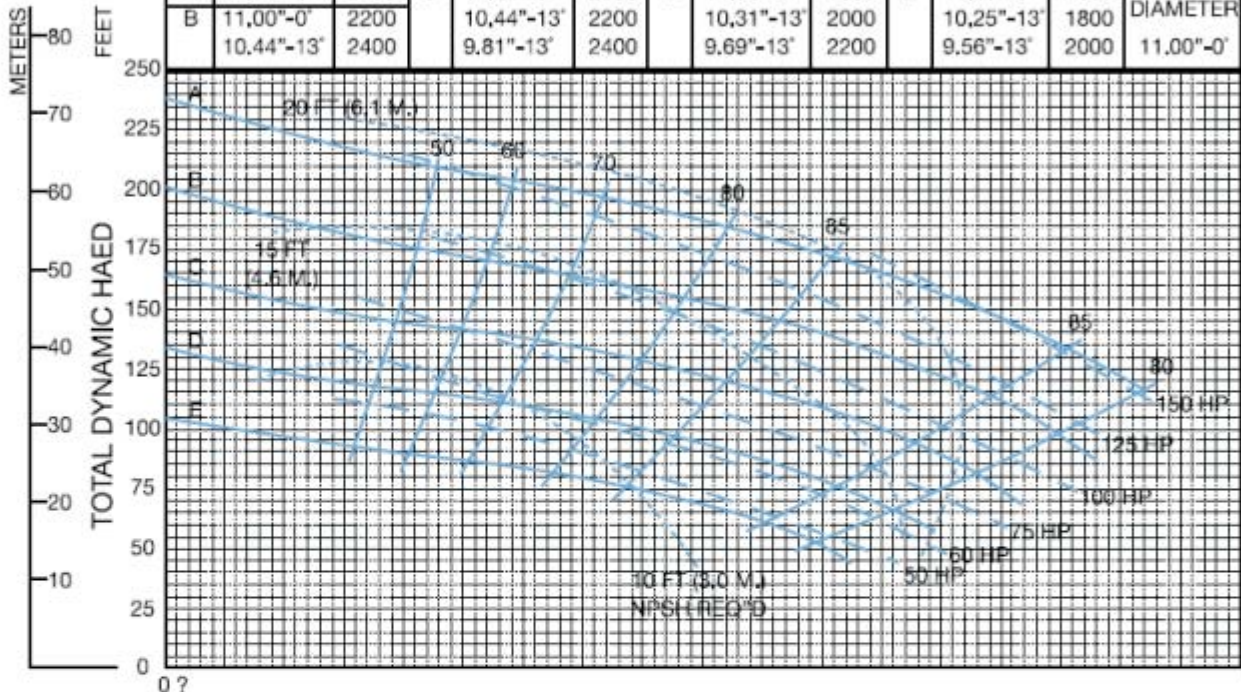

Performances shown are for cool water and pumps with packing. Horsepower and/or performance adjustments may be required for other seal configurations and to allow for frame and other losses.

HP, efficiency and NPSHR are for full diameter impeller only and may vary somewhat for less than full diameter impellers. See fixed speed curves for more exact data at various speeds and impeller diameters.

Feet x .305 = Meters  
 Inches x 25.4 = Millimeters  
 GPM x .227 = Cubic Meters/Hour  
 GPM x 3.785 = Liters/Minute  
 HP x .746 = KW

